

OAK & WALNUT

Nicholas Solid Oak Dressing Table with LED Light and Stool

Assembly instructions. Please read before you begin and keep for future reference.


MODEL
YS-60018

SIZE
100–145 cm W × 40 cm D × 130 cm H

MATERIAL
FAS-graded solid oak




BEFORE YOU START

In the box






Assembled



TABLE FITTINGS (STEPS 1–2)

A  Hex key × 1	B  Hex socket bolt M8 × 40 · × 3	C  Spring washer Ø8 · × 3	D  Flat washer Ø8 · × 3	E  Suction cup with threaded rod M6 · × 2

MIRROR AND STORAGE UNIT FITTINGS (STEP 3)

A  Hex key × 1	B  Hex socket bolt M6 × 40 · × 2	C  Hex socket bolt M6 × 20 · × 10	D  Mirror steel strap 390 × 40 × 4 · × 2	E  Connecting plate 80 × 20 × 3 · × 1	F  Spring washer Ø6 × 12 · × 2	G  Flat washer Ø6 × 14 · × 2

SIDE CABINET FITTINGS (STEPS 4–5)

A  Hex key No. 4 · × 1	B  Hex socket bolt M6 × 40 · × 8	C  Spring washer Ø6 · × 8	D  Flat washer Ø6 · × 8	E  Handle with screws × 1

Protect the surface
Work on a blanket or the flattened carton so the surface is not scratched.

Check the contents
Count the parts against this list. If anything is missing or damaged, contact us before you start.

Lift with two people
Two people are recommended to turn the table over and stand it upright.

STEP

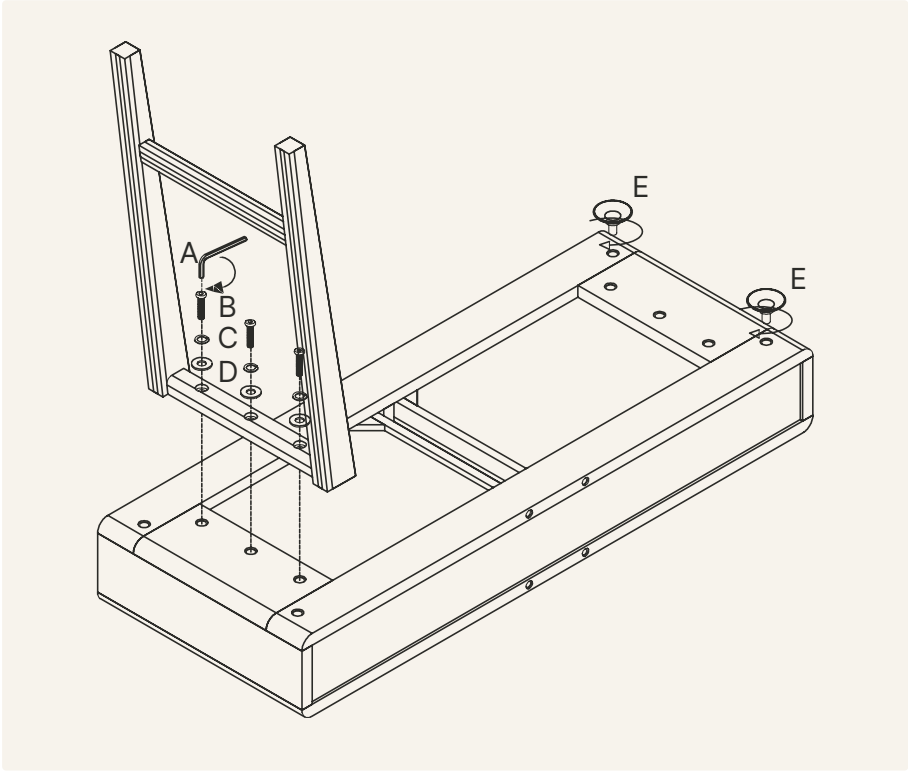
01

Fit the table legs and suction cups

Lay the table upside down or on its side and fit the legs.

Fit each bolt (B) with a spring washer (C) and a flat washer (D) as shown, and tighten with the hex key (A). Take care to fit the hardware in the right order.

Screw the silicone suction cups (E) into the underside of the table.




STEP

02

Fit the table handles

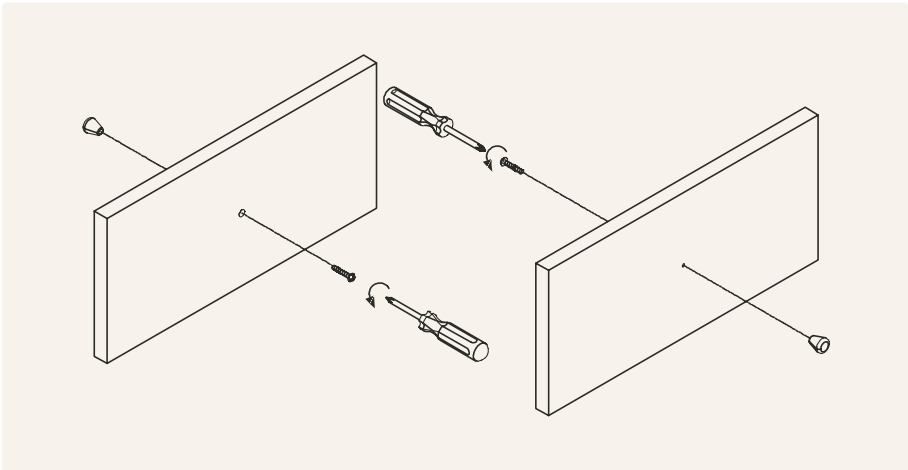Fit the handles the right way up, then put the table in place.



STEP

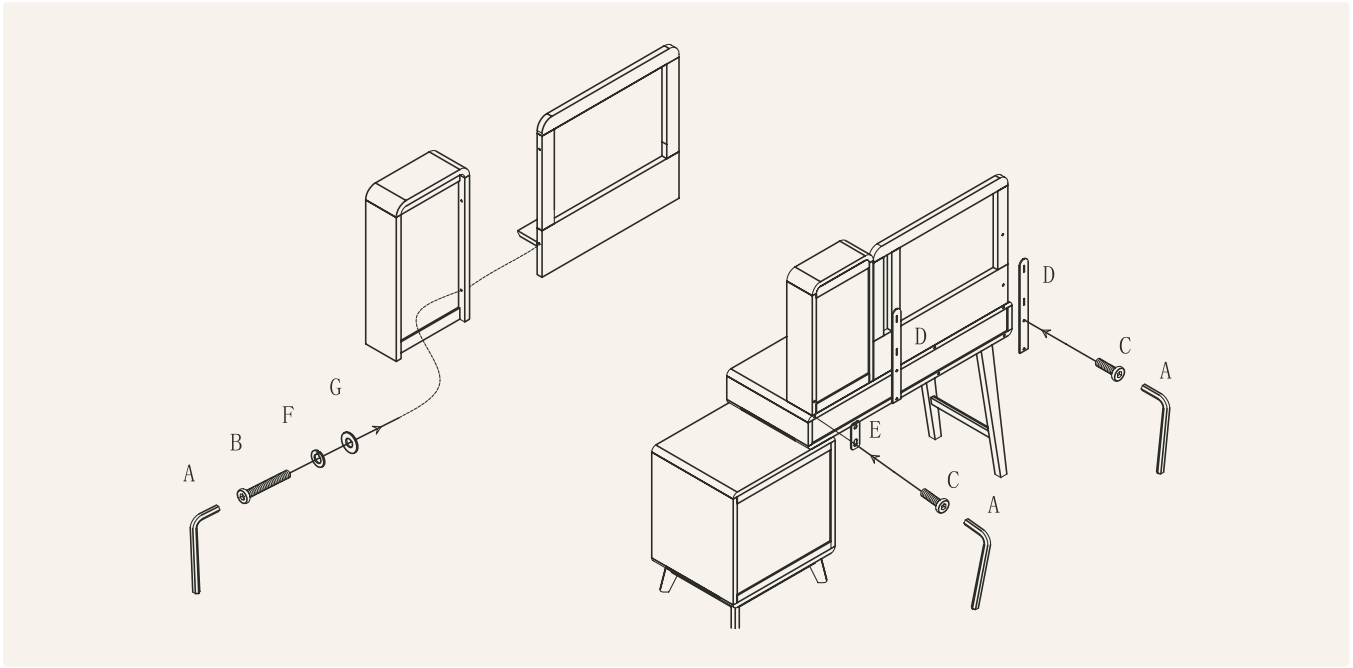
03

Fit the mirror and storage unit

Following the matching holes, first fix the storage unit to the mirror with the bolts (B), spring washers (F) and flat washers (G), as shown.

Then fix the mirror and storage unit to the dressing table with the mirror steel straps (D), the connecting plate (E) and the bolts (C), as shown. Tighten with the hex key (A).

Note: to stop the dressing table's bolts scratching the wall, stick felt on at the bolts to protect it.




STEP

04

Fit the side cabinet legs

Lay the cabinet upside down or on its side and fit the legs.

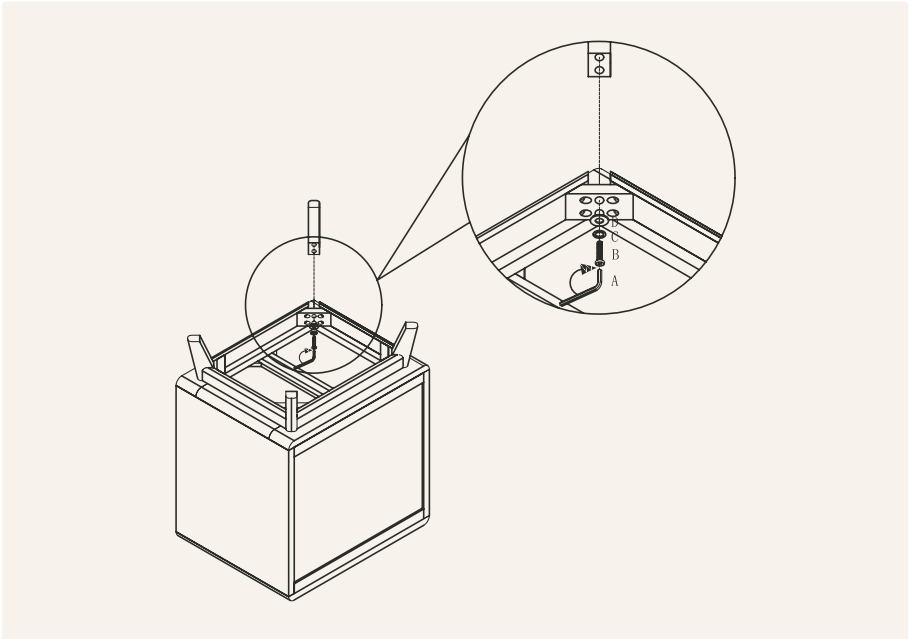Fit each bolt (B) with a spring washer (C) and a flat washer (D) as shown, and tighten with the hex key (A). Take care not to fit the hardware in the wrong order.




STEP

05

Fit the cabinet handles

Fit the handles the right way up, including the handle (E) with its screws, as shown.

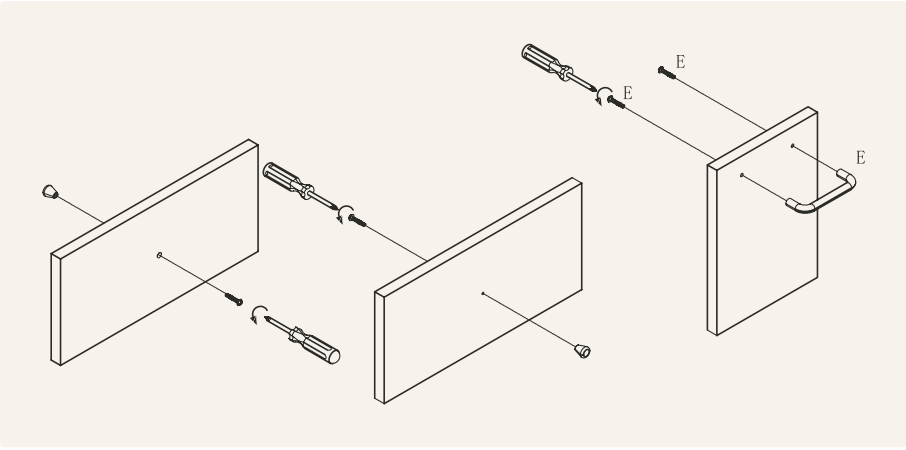Then put the cabinet in place.



EVERYDAY CARE

Wipe with a soft, dry cloth. Use coasters and placemats under hot or wet items.

SOLID TIMBER

Oak moves with the seasons. Check the fittings periodically and tighten if needed.

WARRANTY

10-year warranty on the solid timber structure; 1-year warranty on all other parts. Full terms: oakwalnut.com.au/pages/warranty

Need a hand?

Email info@oakwalnut.com.au · Call 0468 029 833
Please include your order number and model number.
oakwalnut.com.au